

# Ameron

## Centrecon S-Series Octagonal Pole

### Available in base plate and embedded styles.

Our S-Series poles are well suited for light duty applications such as shopping centers, parking lots, green belts and similar areas. Application can be post top or side mounted. Ameron poles are constructed with the highest quality materials and workmanship to ensure uniformity and long term structural integrity.

### Features and Benefits

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength, durability, and vibration resistance
- Natural stone and terrazzo aggregates maintain a like-new appearance with virtually no maintenance
- Conforms to applicable sections of ACI, AASHTO, ASTM and PCI standards
- Exclusive 10-year warranty

### Colors and Finishes


A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and beauty of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amerishield™ a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

### Durability with a classic touch.



# Ameron Centrecon S-Series Octagonal Pole

3-1/2" TOP O.D.  
Across the flats

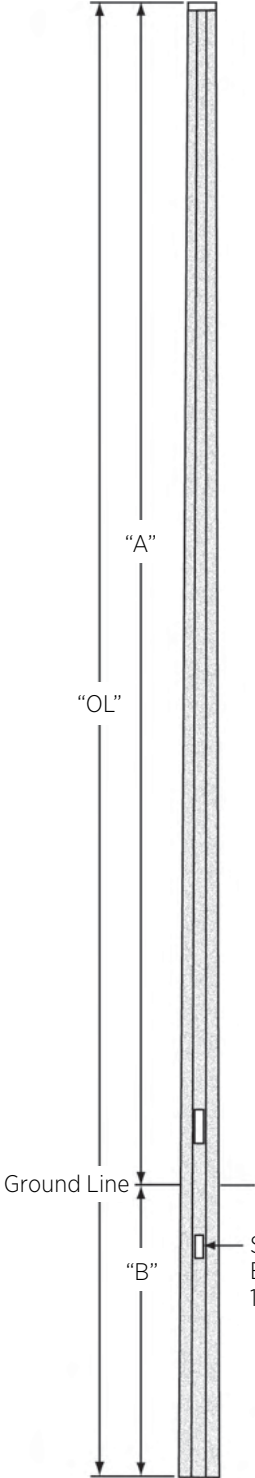

## Base plate style - information

Catalog Number	Pole Height "A"	Bottom OD	Anchor Bolt	Bolt Circle	Base Plate (Sq)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
SBO04	13'-1"	5-5/8"	3/4" x 24" x 4"	10"	9"	6,960	220
SBO05	16'-5"	6-1/8"	3/4" x 24" x 4"	10"	9"	8,400	300
SBO05.5	18'-0"	6-7/16"	3/4" x 24" x 4"	10"	9"	9,180	340
SBO06	19'-8"	6-11/16"	3/4" x 24" x 4"	10"	9"	9,960	400
SBO07	23'-0"	7-3/16"	3/4" x 24" x 4"	10"	9"	11,630	480
SBO08.3	27'-3"	7-7/8"	3/4" x 24" x 4"	11-1/2"	11"	12,300	620


## Embedded style - information

Catalog Number	Pole Height "A"	Bottom OD	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
SEO03	9'-10"	5-5/8"	3'-3"	13'-1"	5,120	250
SEO04	13'-1"	6-1/8"	3'-3"	16'-4"	6,960	280
SEO04.3	14'-1"	6-7/16"	4'-0"	18'-1"	7,080	330
SEO04.6	15'-0"	6-11/16"	4'-0"	19'-0"	7,200	360
SEO05	16'-5"	6-11/16"	3'-7"	20'-0"	8,400	380
SEO06	19'-8"	7-5/16"	3'-11"	23'-7"	9,960	470
SEO07	23'-0"	7-7/8"	4'-3"	27'-3"	11,630	570


**Specifications:** Use Centrecon Specifications

**Colors and finishes:** See Centrecon color selection guide


**Luminaire mounting:** See Mounting Options section for more information

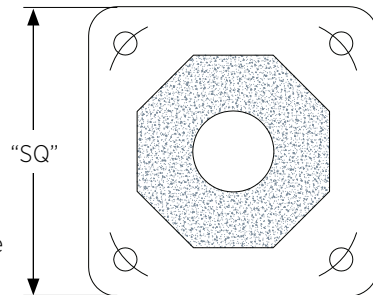

Slotted base plate  
Prestressed to pole

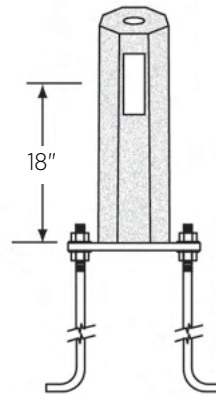

Elevation  
See recommended  
"capping details"



Shaft cross section detail